

Metallbau - Engländer



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 564 231 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
14.05.1997 Bulletin 1997/20

(51) Int. Cl.⁶: B32B 27/08, B32B 1/08,
A61L 29/00

(21) Application number: 93302468.9

(22) Date of filing: 30.03.1993

*(Cl 1)
oth / prop
enter long*

(54) Medical solution tubing

Schlauch für medizinische Lösungen

Tube pour des solutions médicales

*(Cl 2)
SEBS
internett
long
* in blends
of SEBS*

(84) Designated Contracting States:
AT BE CH DE DK ES FR GB GR IE IT LI LU NL PT
SE

(30) Priority: 30.03.1992 US 856844

(43) Date of publication of application:
06.10.1993 Bulletin 1993/40

(73) Proprietor: W.R. Grace & Co.-Conn.
New York, New York 10036 (US)

(72) Inventor: Mueller, Walter Berndt
Inman, SC 29349 (US)

(74) Representative: Bentham, Stephen
J.A. KEMP & CO.
14 South Square
Gray's Inn
London WC1R 5LX (GB)

(56) References cited:
EP-A- 0 203 630
EP-A- 0 310 143
US-A- 4 627 844

EP-A- 0 216 639
EP-A- 0 380 270

EP 0 564 231 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

This invention relates to autoclavable flexible tubing suitable for use with medical solution packaging.

Currently, it is common medical practice to package liquids such as medical solutions for parenteral administration in disposable, flexible pouches. These pouches should be characterized by collapsibility, transparency, and adequate mechanical strength. They must also be able to resist the relatively high temperatures required for heat sterilization of their contents, for example in an autoclave. Typically, medical solutions and the like are autoclaved at about 123°C (253°F) for periods of 15 to 30 minutes.

Connector tubing is used in combination with such flexible pouches. This tubing is used to introduce additional materials to the medical solution inside the pouch, and to administer the medical solution to the patient. This connector tubing must be chemically and physically compatible with the medical solution pouch material. The tubing must also be resistant to the heat generated during autoclaving of the medical solution pouch and tubing. When the tubing is used in combination with for example a polycarbonate connector, it sometimes must be sealable to the connector material by means of ultrasonic, radio frequency (RF) or heat sealing. In some cases, a pin heater is inserted into the tubing to heat the inside as well as the outside of the tubing. It is especially required of such tubing that it be flexible without embrittlement or cracking of the tubing. In this regard, it is known that polyvinyl chloride for example becomes brittle at relatively low temperatures.

Of interest is U. S. Patent 4,643,926 issued to Mueller and assigned to a common assignee with the present application. In the '926 patent, a flexible film suitable for medical solution pouches is disclosed. This film may include a sealant layer of ethylene propylene copolymer, modified ethylene propylene copolymer or flexible copolyester; at least one interior layer of a polymeric material which imparts flexibility to the film, such as very low density polyethylene, ethylene propylene monomer blended with ethylene vinyl acetate copolymer, modified ethylene propylene copolymer, ethylene methyl acrylate copolymer, and modified ethylene vinyl acetate copolymer; and an outer layer of copolyester or ethylene propylene copolymer.

Also of interest is U.S. Patent 4,948,643 issued to Mueller and assigned to a common assignee with the present application. The '643 patent discloses a flexible medical solution tubing having an outer layer of e.g. modified EPC, an intermediate layer of e.g. a blend of modified EMA and EVA or VLDPE, and an inner layer of e.g. PVC, or a blend of copolyester and EVA.

It is an object of the present invention to provide a tubing suitable for use with medical solution packaging, the tubing having good flexibility.

Another object of the present invention is to provide a tubing suitable for use with medical solution packaging characterized by compatibility with prior art packaging and ability to withstand autoclaving of the tubing.

The term "flexible" is used herein to define specific polymeric materials as well as characteristics of a resulting tubing whereby improved flexibility and/or bendability is obtained by the use of these specific polymeric materials. Flexible materials may be characterized by a modulus of preferably less than 50,000 PSI (ASTM D-882-81) and more preferably less than 40,000 PSI (ASTM D-882-81).

The term "polymer", "polymeric", and the like, unless specifically defined or otherwise limited, generally includes homopolymers, copolymers and terpolymers and blends and modifications thereof.

The term "ethylene n-butyl acrylate copolymer" or "EnBA" is used herein to refer to a copolymer formed of ethylene and n-butyl acrylate comonomer wherein the ethylene units are present as more than half of the total copolymer.

The term "intermediate" is used herein to refer to a layer of a multilayer tubing which is bonded on both of its major surfaces to another layer.

The terms "melt flow", "melt index", "MI", and the like are used herein to mean the amount, in grams, of a thermoplastic resin which can be forced through a given orifice under a specified pressure and temperature within 10 minutes.

The value should be determined in accordance with ASTM D 1238-79.

The term "ethylene propylene rubber" or EPR is used herein to define a polymeric elastomer obtained by the stereospecific copolymerization of ethylene and propylene, or the two of them with a third monomer such as diene (EPDM). Densities are typically below about 0.88 gm/cc as measured by ASTM D-1505.

The term "ethylene vinyl acetate copolymer" (EVA) is used herein to refer to a copolymer formed from ethylene and vinyl acetate monomers wherein the ethylene derived units in the copolymer are present in major amounts and the vinyl acetate derived units in the copolymer are present in minor amounts.

The term "ethylene propylene copolymer" is used herein to refer to a copolymer formed from polypropylene monomer and minor amounts, usually less than 6%, of ethylene.

The terms "copolyester" and "elastomeric copolyester" (EPET) and the like refer to polyesters synthesized from more than one diol and a dibasic acid. Copolyesters as used herein may also be characterized as copolymers of polyether and polyethylene terephthalate. More preferably copolyesters as used herein may be characterized as polymeric materials derived from 1,4 cyclohexane dimethanol, 1,4 cyclohexane dicarboxylic acid, and polytetramethylene glycol ether, or equivalents of any of the above, as reactants.

The term "modified" and the like is used herein to refer to a polymeric material in which some or all of the substitu-

ents are replaced or supplemented by other materials or substituents, providing a change in properties such as improved flexibility or elastomeric properties. For example, a modified ethylene propylene copolymer is for example an ethylene propylene copolymer to which an elastomeric material such as Kraton™ rubber has been added by any means.

5 The term "polymeric elastomer" is used herein to refer to elastomeric styrene copolymers, EPR, or blends thereof.

The present invention provides a polymeric tubing comprising an intermediate layer comprising a polymeric elastomer, a blend of a low melt index EVA and a high melt index EVA, EnBA, or blends thereof; an inner layer, bonded to the inner surface of the intermediate layer, and comprising a polymeric material selected from EVA, a blend of a low melt index EVA and a high melt index EVA, EMA, EnBA, or blends thereof; and an outer layer, bonded to the outer surface of the intermediate layer, and comprising a polymeric material selected from polypropylene, ethylene propylene copolymer, and modified ethylene propylene copolymer.

FIG. 1 is a schematic cross-section of a three layer tubing made in accordance with the invention.

Figure 1 shows a three layer tubing 20 in accordance with the invention. Outer layer 22 is a polypropylene, an ethylene propylene copolymer (EPC), or modified EPC. A suitable EPC is Eltex™ KS 409X6206 available from Solvay. This copolymer has an ethylene content of about 3.8%. A suitable modified EPC is a blend of ethylene propylene copolymer (e.g. Fina Z 9550 available from Fina), and styrene ethylene butylene styrene copolymer (e.g. Kraton 1652 available from Shell). Polyallomers can also be used, such as ethylene propylene block copolymer, available from Eastman as M7853-368A, having a melt flow index of about 12. The inner layer 26 will be in contact at one end with a connector such as a polycarbonate connector. Inner layer 26 will sometimes require sealability with the polycarbonate or other connector material. Sealing may be done by e.g. ultrasonic sealing, heat sealing, or RF sealing depending on the materials used.

Intermediate layer 24 can be any of various polymeric elastomers which impart flexibility to the resulting film. Especially preferred materials are elastomeric styrene copolymers such as those available from Shell as Kraton™ resins. These include styrene ethylene butylene styrene copolymer (SEBS) (e.g. G 2706, G 2703, and G 2712); styrene isoprene styrene copolymer (SIS) (e.g. D 1107); and styrene butadiene styrene copolymer (SBS) (e.g. D 1102). Also useful in intermediate layer 24 is EPR, such as Tafmer™ resins from Mitsui, e.g. Tafmer P-0480 and P-0680.

Another material suitable for layer 24 is a blend of a low melt index (LMI) EVA (i.e. MI is less than 1) and a high melt index (HMI) EVA (i.e. MI is greater than or equal to 1). An example of an LMI EVA is Elvax™ 3165 available from Du Pont, and having a vinyl acetate content of about 18% by weight and a melt index of about .7. An example of an HMI EVA is Elvax 3182, also available from Du Pont, and having a vinyl acetate content of about 28% by weight and a melt index of about 3. These respective LMI and HMI EVA copolymers can be blended in any suitable percentages from 1 to 99% of each material.

Intermediate layer 24 can also be an EnBA such as EA719.009 from Quantum/USI.

Layer 24 can also comprise a blend of any of the materials indicated above for layer 24.

35 Inner layer 26 of the three layer embodiment of the present invention is preferably an ethylene vinyl acetate copolymer, such as those mentioned above for intermediate layer 24.

The EVA of inner layer 26 can be irradiated to improve certain properties of the tubing, but irradiation can also adversely affect the tubing in some respects.

40 An alternative for layer 26 is a blend of an LMI EVA and an HMI EVA, such as the blend given above for intermediate layer 24.

An alternative for layer 26 is the use of ethylene methyl acrylate copolymer (EMA) such as Chevron DS 1193 having 33% methyl acrylate and a melt index of about 2.

Another alternative is the blending of either LMI or HMI EVA, or both, with EMA. The respective percentages of EVA and EMA can range from 1 to 99% of each material. This alternative is especially useful in applications where tubing is solvent welded to PVC fittings, using a solvent such as cyclohexanone.

Still another alternative for inner layer 26 is an EnBA such as EA719.009 from Quantum/USI.

Layer 26 can also comprise a blend of any of the materials indicated above for layer 26.

The materials of inner layer 26 are especially chosen for their heat resistance so that the tubing may be autoclaved along with the accompanying medical solution pouch and still maintain its structural integrity.

50 The tubing after coextrusion or other suitable processing by conventional means may optionally be cross-linked by radiation techniques well known in the art. This irradiation may strengthen the tubing particularly for autoclaving purposes. Alternatively, a chemical cross-linking agent may be introduced to the resin melt of any or all of the layers discussed above prior to extrusion to effect the cross-linking of one or more layers of the tubing.

55 EXAMPLES

Exemplary multi-layer structures were coextruded by conventional means, and in one case (Example 6) irradiated. These structures are viewed as potential replacements for polyvinyl chloride tubing. Examples 1 through 11 are listed below with their respective formulations, beginning with the outer layer and ending with the inner layer. All examples

except Example 10 were actually produced. Examples 1 through 11 include the following materials:

MATERIAL	TRADE DESIGNATION
EPC#1	Z 9550
SEBS#1	KRATON G 2706X
SEBS#2	KRATON G 2703
SEBS#3	KRATON G 1652
Modified EPC:	70% Z9550 + 30% KRATON G 1652
SIS:	KRATON D 1107
EVA#1:	ELVAX 3165
EVA#2:	ELVAX 3182
EMA:	CHEVRON DS 1193
EPR:	TAFMER P 0480
ADHESIVE:	BYNEL E 361
EPET:	ECDEL 9965
EnBA:	EA719.009
PVC:	TEKNOR APEX 3300R-68NT

In Example 1 the multilayer tubing comprised modified EPC/SEBS#1/EVA#1.

In Example 2 the multilayer tubing comprised modified EPC/SEBS#2/EVA#1.

In Example 3 the multilayer tubing comprised modified EPC/SIS/EVA#1.

In Example 4 the multilayer tubing comprised modified EPC/EPR/EVA#1.

In Example 5, the multi-layer tubing comprised modified EPC/SEBS#1/80% EVA#1 + 20% EVA#2.

In Example 6, the multi-layer tubing comprised modified EPC/SEBS#1/EVA#1 (irradiated).

In Example 7, the multi-layer tubing comprised modified EPC/SEBS#2/60% EVA#1 + 40% EMA.

In Example 8, the multi-layer tubing comprises modified EPC/SEBS/50% EVA#2 + 50% EMA.

In Example 9, the multi-layer tubing comprised modified EPC/50% EnBA + 50% EPR/EnBA.

In Example 10, the multi-layer tubing comprised modified EPC/50% EVA#1 + 50% EVA#2/EnBA.

It should be noted that the detailed description and specific examples which indicate the presently preferred embodiments of the invention are given by way of illustration only. Various changes and modifications within the spirit and scope of the claims will become apparent to those of ordinary skill in the art upon review of the above detailed description and examples.

Claims

1. A polymeric tubing comprising:

a) an intermediate layer comprising a polymeric material selected from

i) polymeric elastomer,

ii) a blend of a low melt index ethylene vinyl acetate copolymer (EVA) and a high melt index EVA,

iii) ethylene n-butyl acrylate copolymer, and

iv) blends thereof;

b) an inner layer, bonded to the inner surface of the intermediate layer, and comprising a polymeric material selected from

i) ethylene vinyl acetate copolymer,

ii) a blend of a low melt index EVA and a high melt index EVA,

iii) ethylene methyl acrylate copolymer,

- iv) ethylene n-butyl acrylate copolymer, and
- v) blends thereof; and

c) an outer layer, bonded to the outer surface of the intermediate layer, and comprising a polymeric material selected from

- i) polypropylene,
- ii) ethylene propylene copolymer, and
- iii) modified ethylene propylene copolymer.

2. A tubing according to claim 1 wherein the intermediate layer comprises a polymeric elastomer selected from:

- a) styrene ethylene butylene styrene copolymer;
- b) styrene isoprene styrene copolymer;
- c) styrene butadiene styrene copolymer;
- d) ethylene propylene rubber; and
- e) blends thereof.

3. A tubing according to claim 1 wherein the intermediate layer comprises a blend of from 1 to 99% by weight of a low melt index EVA, and from 99% to 1% by weight of a high melt index EVA.

4. A tubing according to any one of claims 1 to 3, wherein the inner layer comprises a blend of from 1 to 99% by weight of a low melt index EVA, and from 99% to 1% by weight of a high melt index EVA.

5. A tubing according to any one of the preceding claims, wherein the low melt index EVA has a melt index less than 1, and the high melt index EVA has a melt index of greater than or equal to 1.

Patentansprüche

1. Polymerer Schlauch, der

a) eine Zwischenschicht, die polymeres Material umfaßt, das ausgewählt ist aus

- i) polymerem Elastomer,
- ii) einer Mischung aus Ethylen/Vinylacetat-Copolymer (EVA) mit niedrigem Schmelzindex und EVA mit hohem Schmelzindex,
- iii) Ethylen/n-Butylacrylat-Copolymer und
- iv) Mischungen derselben,

b) eine innere Schicht, die an die innere Oberfläche der Zwischenschicht gebunden ist und polymeres Material umfaßt, das ausgewählt ist aus

- i) Ethylen/Vinylacetat-Copolymer,
- ii) einer Mischung aus EVA mit niedrigem Schmelzindex und EVA mit hohem Schmelzindex,
- iii) Ethylen/Methylacrylat-Copolymer,
- iv) Ethylen/n-Butylacrylat-Copolymer und
- v) Mischungen derselben, und

c) eine Außenschicht umfaßt, die an die äußere Oberfläche der Zwischenschicht gebunden ist und polymeres Material umfaßt, das ausgewählt ist aus

- i) Polypropylen,
- ii) Ethylen/Propylen-Copolymer und
- iii) modifiziertem Ethylen/Propylen-Copolymer.

2. Schlauch nach Anspruch 1, bei dem die Zwischenschicht polymeres Elastomer umfaßt, das ausgewählt ist aus

- a) Styrol/Ethylen/Butylen/Styrol-Copolymer,
- b) Styrol/Isopren/Styrol-Copolymer,

- c) Styrol/Butadien/Styrol-Copolymer,
- d) Ethylen/Propylen-Kautschuk, und
- e) Mischungen derselben.

- 5 3. Schlauch nach Anspruch 1, bei dem die Zwischenschicht eine Mischung aus 1 bis 99 Gew.-% EVA mit niedrigem Schmelzindex und 99 bis 1 Gew.-% EVA mit hohem Schmelzindex umfaßt.
4. Schlauch nach einem der Ansprüche 1 bis 3, bei dem die innere Schicht eine Mischung aus 1 bis 99 Gew.-% EVA mit niedrigem Schmelzindex und 99 bis 1 Gew.-% EVA mit hohem Schmelzindex umfaßt.
- 10 5. Schlauch nach einem der vorhergehenden Ansprüche, bei dem das EVA mit niedrigem Schmelzindex einen Schmelzindex kleiner als 1 aufweist und das EVA mit hohem Schmelzindex ein Schmelzindex größer als oder gleich 1 aufweist.

15 **Revendications**

1. Tube en polymère comprenant :

- 20 a) une couche intermédiaire comprenant un matériau polymère choisi parmi
- i) un élastomère de polymère,
 - ii) un mélange d'un copolymère éthylène vinyl acétate (EVA) à un indice de fusion faible et d'un EVA à indice de fusion élevé,
 - iii) un copolymère éthylène n-butyl acrylate, et
 - 25 iv) des mélanges de ceux-ci ;
- b) une couche intérieure, liée à la surface intérieure de la couche intermédiaire, et comprenant un matériau polymère choisi parmi
- 30 i) un copolymère éthylène vinyl acétate,
- ii) un mélange d'un EVA à faible indice de fusion et d'un EVA à indice de fusion élevé,
- iii) un copolymère éthylène méthyl acrylate,
- iv) un copolymère éthylène n-butyl acrylate, et
- 35 v) des mélanges de ceux-ci ; et

c) une couche extérieure liée à la surface extérieure de la couche intermédiaire, et comprenant un matériau polymère choisi parmi

40 i) le polypropylène,
- ii) un copolymère éthylène propylène, et
- iii) un copolymère éthylène propylène modifié.

2. Tube selon la revendication 1, caractérisé en ce que la couche intermédiaire comprend un élastomère polymère choisi parmi

- 45 a) un copolymère styrène éthylène butylène styrène ;
- b) un copolymère styrène isoprène styrène ;
- c) un copolymère styrène butadiène styrène ;
- d) un caoutchouc d'éthylène propylène ; et
- 50 e) des mélanges de ceux-ci.

3. Tube selon la revendication 1, caractérisé en ce que la couche intermédiaire comprend un mélange de 1 à 99% en poids d'un EVA à faible indice de fusion, et de 99% à 1% en poids d'un EVA à indice de fusion élevé.

55 4. Tube selon l'une quelconque des revendications 1 à 3, caractérisé en ce que la couche intérieure comprend un mélange de 1 à 99% en poids d'un EVA à indice de fusion faible, et de 99% à 1% en poids d'un EVA à indice de fusion élevé.

5. Tube selon l'une quelconque des revendications précédentes, caractérisé en ce que l'EVA à faible indice de fusion

EP 0 564 231 B1

possède un indice de fusion moindre que 1, et l'EVA à indice de fusion élevé possède un indice de fusion plus grand que ou égal à 1.

5

10

15

20

25

30

35

40

45

50

55

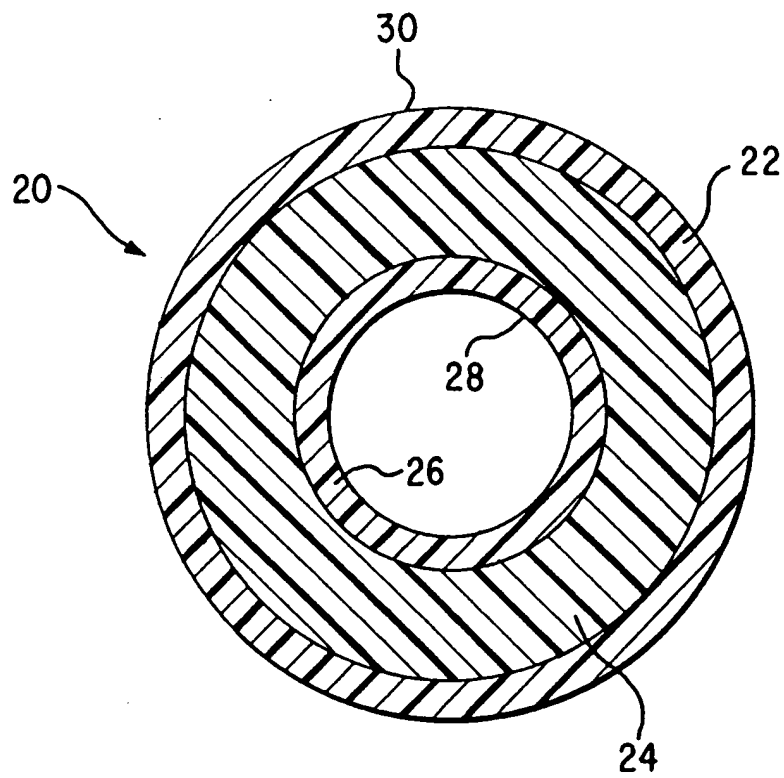


FIG. 1